




SUPER SPORT LT500 SPECIFICATIONS (AU)

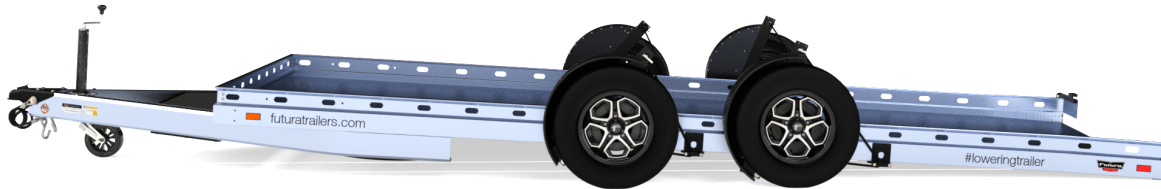

THE TRAILER YOUR CAR WOULD CHOOSE

DECK LENGTH 5000 mm	DECK WIDTH 2000 mm
OVERALL LENGTH 6500 mm	OVERALL WIDTH 2500 mm
FENDER HEIGHT Fender on 235 mm Fender off 180 mm (approx)	GROUND CLEARANCE 385 mm from deck
G.V.W.R. 2500 kg	G.A.W.R. (each axle) 1700 kg
TARE WEIGHT 600 kg	LOAD CAPACITY 1900 kg
DECK ANGLE Only 3 degree	FLARED TAIL WIDTH 2145 mm
ENGINEERED TO BE EFFORTLESS	
REMOVABLE FENDERS Extruded aluminium, powder coated	LICENCE PLATE BRACKET Aluminium, fold up
TIE POINTS Continuous airline track and slotted chassis rail	RECOVERY WINCH 12V electric with wireless remote
JACK Centre mount jockey wheel, auto stow wheel	COUPLING 1 7/8 Snap-on steel coupler

WHEELS 165R13	TYRES 165R 13C 8 PLY Light Truck
AXLE (patented) 1700 kg galvanised steel torsion	SUSPENSION Independent torsion arm (PU)
HUBS 1700 kg	BRAKES Electric
WINCH 12V electric winch with wireless remote control	RIGGING Double braided 12mm UHMWPE synthetic rope
BATTERY 12V 30AH Gel deep cycle	LIGHTING Micro LED fender mounted clearance Recessed LED stop, tail, indicators Combined LED/reflector marker lights
CHARGING Onboard DC-DC to trailer plug aux pin and solar panel	ELECTRIC CONNECTOR 7-Way RV, flat pin trailer plug
BUILT TO LAST A LIFETIME	
FINISH - ALUMINIUM PARTS Silver anodising and black powder coating	FINISH - STEEL PARTS Hot dip galvanised
CHASSIS & TONGUE Extruded aluminium 6005-T6 Extruded 6005-T6 C section	DECK Extruded aluminium 6005-T6 interlocking panels